



CD柵

■宅地内堅ろうな配管が出来ます。


C型蓋

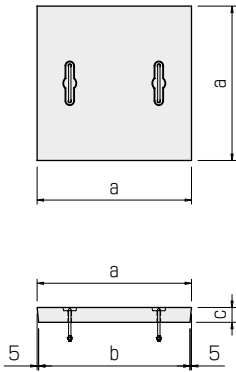


縁塊

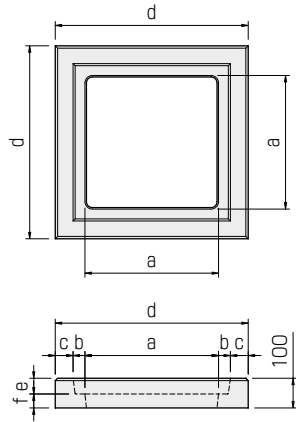


側塊H150

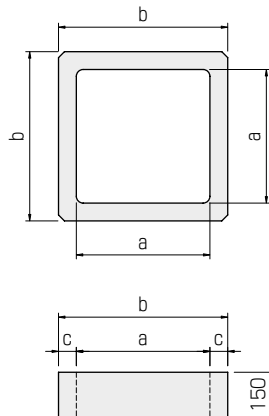

側塊H300

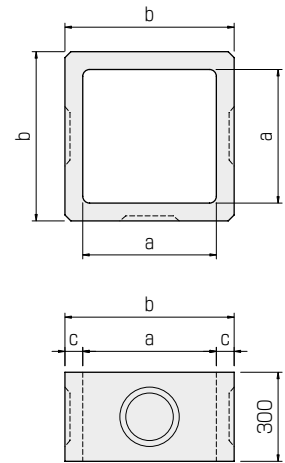

側塊浸透タイプ

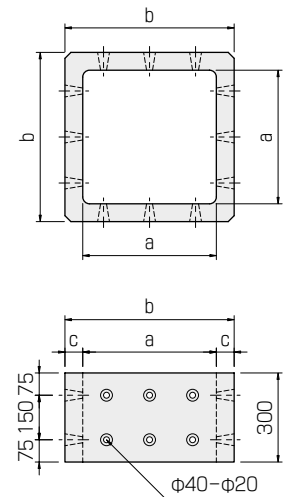

呼び	寸法(mm)						参考重量(kg)		
	a	b	c	d	e	f			
C型蓋	300	370	360	50	—	—	—	17	Ⓢ
	360	435	425	50	—	—	—	23	
	450	525	515	50	—	—	—	33	
	500	570	560	50	—	—	—	38	Ⓢ
	※600	675	665	60	—	—	—	63	
縁塊	300	300	40	60	500	53	47	32	Ⓢ
	360	360	40	60	560	53	47	36	
	450	450	40	60	650	53	47	42	
	500	500	40	60	700	53	47	47	Ⓢ
	600	600	40	60	800	63	37	55	
側塊H150	300	300	400	50	—	—	—	25	Ⓢ
	360	360	460	50	—	—	—	29	⓪
	450	450	570	60	—	—	—	43	⓪
	500	500	620	60	—	—	—	47	Ⓢ
	600	600	720	60	—	—	—	60	⓪
側塊H300	300	300	400	50	—	—	—	50	Ⓢ
	360	360	460	50	—	—	—	58	
	450	450	570	60	—	—	—	85	
	500	500	620	60	—	—	—	94	Ⓢ
	600	600	720	60	—	—	—	120	
側塊浸透タイプ	360	360	460	50	—	—	—	56	⓪
	450	450	570	60	—	—	—	83	⓪
	600	600	720	60	—	—	—	117	⓪

※蓋600についてはそれぞれ2つ割とし手掛穴各4ヶとする。