



# 鉄筋コンクリート側溝用蓋(ドレン蓋) ISV・IRV (茨城県組合型)

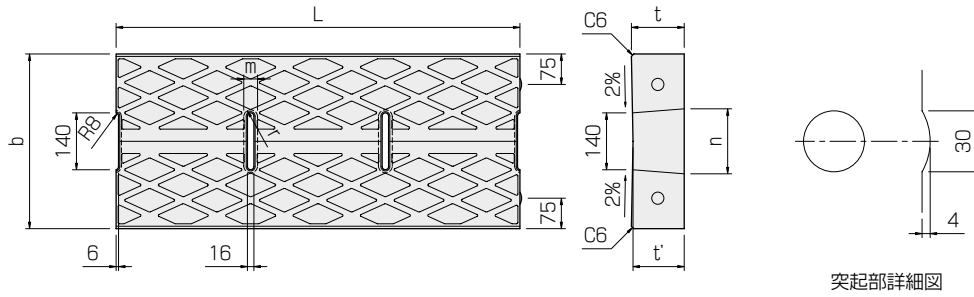

種類	呼び	寸法(mm)							参考重量(kg)
		b	L	t	t'	m	n	r	
歩道用 ISV	300	430	994	100	96	34	155	17	97
	400	530	994	100	95	34	155	17	120
	500	630	994	120	114	38	158	19	170
	600	730	994	120	113	38	158	19	197
車道用 IRV	300	430	994	130	126	40	160	20	128
	400	530	994	130	125	40	160	20	158
	※500	630	994	150	144	46	163	23	215
	※600	730	994	150	143	46	163	23	249

※は特殊型

# 長尺U字溝用グレーチング IH (茨城県型)

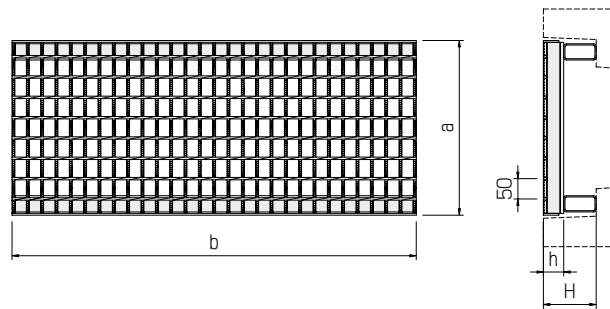

荷重	溝幅	県規格	寸法(mm)				参考重量(kg)
			b	a	h	H	
車道用 T-25	250	IH0-250	995	370	44	100	28.5
			485	370	44	100	14.2
	300	IH0-1	995	430	50	130	41.1
			501	430	50	130	21.0
	350	IH0-2	995	480	60	130	48.4
			501	480	60	130	24.2
	400	IH0-3	995	530	65	130	55.6
			501	530	65	130	28.5
	450	IH0-4	995	580	75	150	68.3
			501	580	75	150	35.0
	500	IH0-5	995	630	90	150	94.0
			501	630	90	150	47.7
歩道用 T-14	250	IH2-250	995	370	38	100	28.5
			485	370	38	100	14.2
	300	IH2-1	995	430	44	100	31.6
			501	430	44	100	14.6
	350	IH2-2	995	480	50	100	42.3
			501	480	50	100	24.2
	400	IH2-3	995	530	50	100	45.7
			501	530	50	100	22.9
	450	IH2-4	995	580	55	120	57.7
			501	580	55	120	28.9
	500	IH2-5	995	630	60	120	61.7
			501	630	60	120	30.9

※表中の☐は受注生産です。